


MFS30D – 420 Stessco Catcher



RPM	KPH	Knots	LPH	K/L
1000	6	3.2	0.7	8.57
1500	8	4.1	1.1	6.82
2000	9	4.6	1.7	5.00
2500	10	5.4	2.4	4.17
3300	14	7.3	4.3	3.14
4000	25	13.5	6.2	4.03
4500	28	15.1	6.9	4.06
5000	36	19.4	7.3	4.93
5500	42	22.4	9.0	4.61
6000	46	24.6	10.6	4.29
6400	51	27.6	10.9	4.70

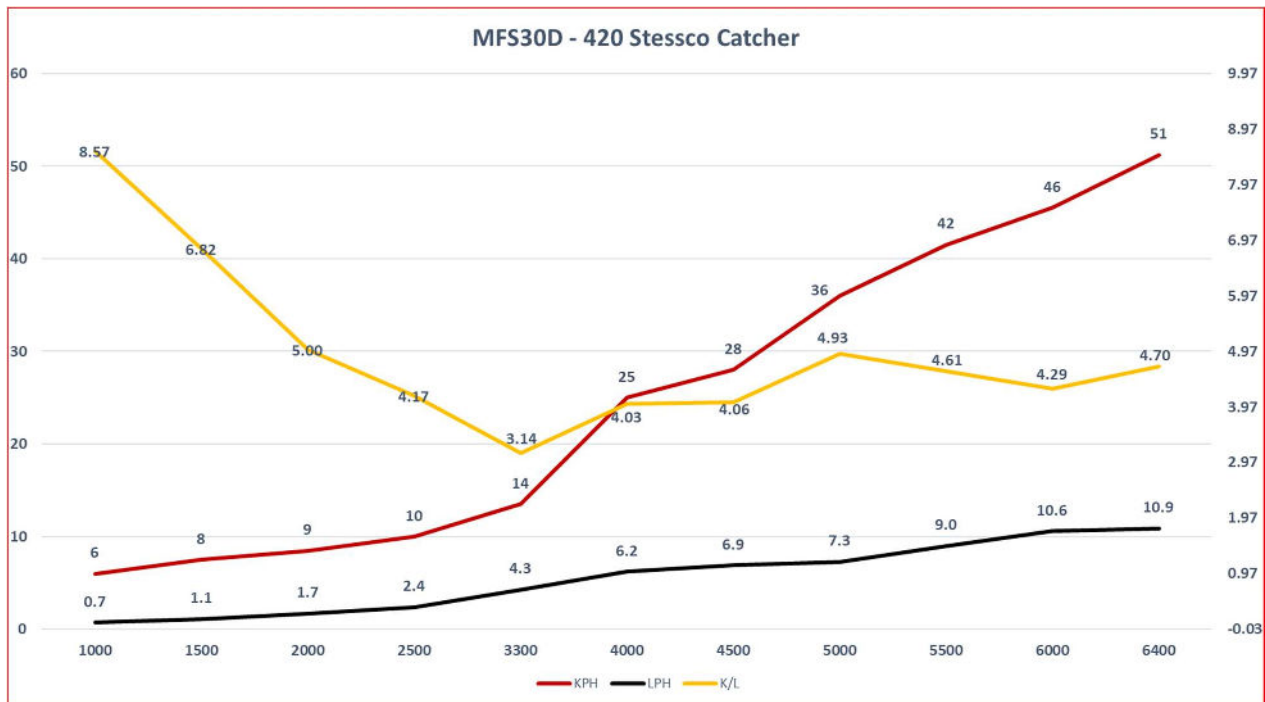

- **MFS30D ET L** With Multi-function Tiller
- **Configuration** 3 cylinder – 12 valve, roller rockers
- **Displacement** 500cc (30.5 cu in)
- **Bore & Stroke** 61 x 57mm (2.40 x 2.25in)
- **Gear Ratio** 2.17:1
- **Propeller pitch** 9.9 x 12 STD Alloy
- **Transom height** 20"
- **Fuel** Unleaded petrol (87 octane)
- **RPM Range** 5500 – 6500
- **Alternator** 12V 210W (17.5A)
- **Weight** 20" shaft - 71.5 kg (with Tiller)
- **Boat** 4500mm LOA, Beam 2040mm
- **Hull** Alloy - 3mm bottom, 3mm sides
- **Boat Load** Hull 236kg + 1 pax + 25L fuel + E motor + S Gear
- **Weight as tested** 517kg with Troll Motor and Bimini
- **Fuel Tank** 25L Tote tank
- **Conditions** Fresh Water, River Weir, 10knts, Light Chop
- **Water Temp** 19 c
- **Air Temp** 26 c / 83% Humidity

